

FLEXIBLE SOLUTIONS FOR SOLAR APPLICATIONS

SOLAR UYGULAMALARI İÇİN ESNEK ÇÖZÜMLER



 **AYVAZ**

FLEXIBLE METAL HOSE WITHOUT BRAIDING

ESNEK ÖRGÜSÜZ METAL HORTUM

Hose Material: Stainless Steel
AISI 316L, AISI 304, AISI 321
DN6-DN200

- On wooden rolls
- On coils (25/50 meters)
- On request lengths

Hortum: Paslanmaz Çelik
AISI 316L, AISI 304, AISI 321
DN6-DN200


- Makara halinde
- Kangal halinde (25/50 metre)
- İstenen kesim boyunda



Standard Pitch / Standart Boğum



Open Pitch / Açık Boğum

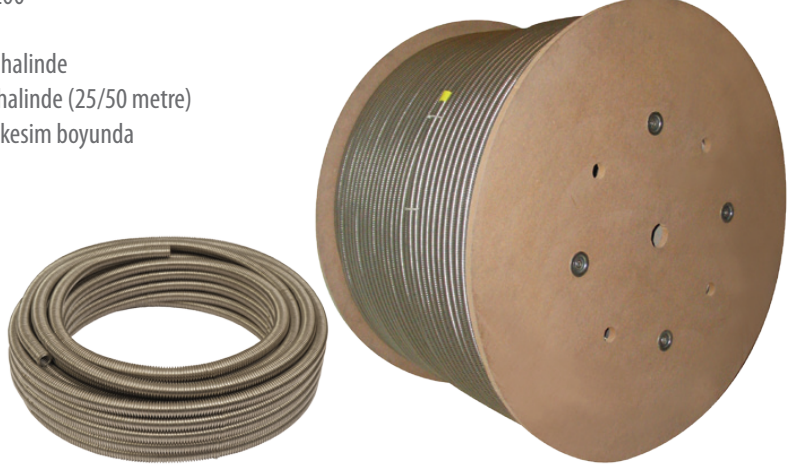

"BOILER-FLEX" FLEXIBLE METAL HOSE FOR HOT WATER BOILER & HEAT EXCHANGER

"BOILER-FLEX" SICAK SU KAZANLARI İÇİN ESNEK METAL HORTUM

Hose: Stainless Steel AISI 316L
Fittings Material: Stainless Steel AISI 316
Fittings Type: Inside / Outside Threaded Pipe
DN12-DN50

Hortum Malzemesi: AISI 316L Paslanmaz Çelik
Fittings: AISI 316 Paslanmaz Çelik
Fittings Bağlantısı: İçten / Dıştan Dişli Boru
DN12-DN50




"2 IN 1" INSULATED HOSES FOR SOLAR SYSTEMS

"2 IN 1" SOLAR PANEL SİSTEMLERİ İÇİN İZOLELİ ÇİFTLİ HORTUM

Flexible Metal Hose AISI 316L
PVC Braiding
Silicon/Non-Silicon Cable
Insulation Thickness:
9mm / 13 mm / 19 mm
Standard / Open Pitch Convolution
Diameter: DN12-DN16-DN20-DN25


Esnek Metal Hortum AISI 316L
PVC Örgülü
Silikon/Non-Silikon Kablolu
İzolasyon Kalınlığı:
9 mm / 13 mm / 19 mm
Standart / Açık Boğum
Çap: DN12-DN16-DN20-DN25

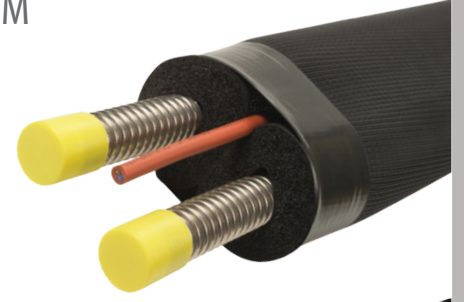

EP-2FLEX

Semi Flexible Metal Hose AISI 316L
PVC Braiding
Silicon/Non-Silicon Cable
Insulation Thickness:
9mm / 13 mm / 19 mm
Standard / Open Pitch Convolution
Diameter: DN12-DN16-DN20-DN25

Yarı Esnek Metal Hortum AISI 316L
PVC Örgülü
Silikon/Non-Silikon Kablolu
İzolasyon Kalınlığı:
9 mm / 13 mm / 19 mm
Standart / Açık Boğum
Çap: DN12-DN16-DN20-DN25

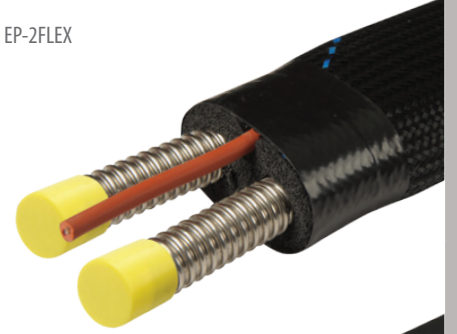

SP-2FLEX

Semi Flexible Metal Hose AISI 316L
Without PVC Braiding
Silicon/Non-Silicon Cable
Insulation Thickness:
9mm / 13 mm / 19 mm
Standard / Open Pitch Convolution
Diameter: DN12-DN16-DN20-DN25

Yarı Esnek Metal Hortum AISI 316L
PVC Örgüsüz
Silikon/Non-Silikon Kablolu
İzolasyon Kalınlığı:
9 mm / 13 mm / 19 mm
Standart / Açık Boğum
Çap: DN12-DN16-DN20-DN25



E-2FLEX



"1 IN 1" INSULATED HOSES FOR SOLAR SYSTEMS

"1 IN 1" SOLAR PANEL SİSTEMLERİ İÇİN İZOLELİ TEKLİ HORTUM

Hose: Stainless Steel AISI 316L (DIN 1.4404)
Insulation Thickness: 9 mm / 13 mm / 19 mm
With / Without PA Braiding
Diameter: DN12-DN16-DN20-DN25

Hortum: AISI 316L Paslanmaz Çelik
İzolasyon Kalınlığı: 9 mm / 13 mm / 19 mm
PA Örgülü / Örgüsüz
Çap: DN12-DN16-DN20-DN25



"KES-TAK" FLEXP SET (DO IT YOURSELF)

"KES-TAK" BİREYSEL MONTAJ

Hose: Stainless Steel AISI 316L (DIN 1.4404)
Half Ring: Stainless Steel AISI 304
Nut: Ms58 Brass
Gasket: Asbestos-free Klingerit
Diameter: DN8-DN20 (In cartoon box set)
DN25-DN50 (Without box set)

Hortum Malzemesi: AISI 316 L Paslanmaz Çelik
Segman: AISI 304 Paslanmaz Çelik
Rakor: Ms58 Piriç
Conta: Asbestsiz Klingerit Conta
Çap: DN8-DN20 (Karton kutuda)
DN25-DN50 (Karton kutusuz)



"MONTAGE BAG" KESTAK FITTINGS SET (BAG)

KESTAK (BİREYSEL MONTAJ) BAĞLANTI SETİ

INCLUDES

- Kestak Piston (1/2", 3/4", 1")
- Cutting Device
- Kestak Fittings Set (1/2", 3/4", 1")

İÇİNDEKİLER

- Kestak Piston (1/2", 3/4", 1")
- Kesme Aparatı
- Kestak Fittings Seti (1/2", 3/4", 1")



* For bigger sizes please contact to sales office.

* Büyük çaplar için satış ofisimize danışınız.

“QUICK SET” FITTINGS SYSTEM FOR FLEXIBLE HOSE

“QUICK SET” ESNEK METAL HORTUMLAR İÇİN CONTASIZ FITİNGS SETİ

Fittings Material: Brass Ms58
Diameter: 1/2", 3/4", 1"

Çap: 1/2", 3/4", 1"
Fittings: Pirinç Ms58



Adapter Male
Adaptör Nipel



Adapter Female
Adaptör Rakor



Female
Rakor



Ring
Ring

Advantages

- Easy assembly without using any additional tool
- Long lifetime
- Non-gasket

Avantajları

- Kolay montaj
- Uzun kullanım ömrü
- Contasız kullanım

“PANFLEX” FLEXIBLE CONNECTIONS BETWEEN SOLAR PANELS

“PANFLEX” SOLAR PANELLER ARASI ESNEK BAĞLANTI ELEMANI

Hose: Stainless Steel AISI 316L (DIN 1.4404)
Fittings: Female x Female / Male x Male
Fittings Material: Brass Ms58
Diameter: DN12-DN16-DN 20

Hortum: AISI 316L Paslanmaz Çelik
Bağlantı: Rakor x Rakor / Nipel x Nipel
Fittings: Pirinç Ms58
Çap: DN12-DN16-DN 20



“SUFLEX” FLEXIBLE CONNECTORS

“SUFLEX” ESNEK BAĞLANTI ELEMANLARI

Hose: Stainless Steel AISI 316L (DIN 1.4404)
Fittings Material: Ni Coated Ms58
Fittings Type: Female / Female
Gasket: Klingerit
Diameter: 1/2", 3/4", 1"

Hortum Malzemesi: AISI 316L Paslanmaz Çelik
Fittings: Nikel Kaplı Ms58
Fittings Bağlantısı: Rakor / Rakor
Conta: Klingerit
Çap: 1/2", 3/4", 1"





HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL
 Tel: +90 212 771 01 45 (pbx) | Fax: +90 212 771 47 27
 info@ayvaz.com | www.ayvaz.com

Cona Caserta/Italy

Tel: +39 0823 187 3988
 rmolaro@ayvaz.com

Ayvaz Germany Viernheim/Germany

Tel: +49 62046014399
 germany@ayvaz.com

Ayvaz Ukraine Kiev/Ukraine

Tel: +380 44 390 57 57
 info@ayvaz.com.ua

Tricorr Warsaw/Poland

Tel: +48 530 030 810
 +48 533 603 335
 tricorr@tricorr.eu

Ayvaz Azerbaijan Baku/Azerbaijan

Tel: +99 (455) 579-84-32
 ahayatov@ayvaz.com

Ayvaz Egypt Cairo/Egypt

Tel: +20 122 819 78 29
 andrew.eid@ayvaz.com

Ayvaz Gulf Dubai/U.A.E

Tel: +971 563550822
 +971 501306871
 mideast@ayvaz.com

Ayvaz China Ningbo/China

Tel: +86 152 5830 7361
 msahin@ayvaz.com

Ayvaz Kazakhstan LLP Almaty/Kazakhstan

Tel: +7 (727) 327 97 57
 info_kz@ayvaz.com

Ayvaz N Ispirih/Bulgaria

Tel: +359 8431 27 32
 office@ayvaz-n.eu

Ayvaz Serbia Belgrade/Serbia

Tel: +381 61 658 70 52
 yakbiyik@ayvaz.com

Ayvaz Vietnam HCMC/Vietnam

Tel: +84 89 8508345
 ggursoy@ayvaz.com

Ayvaz Americas Rhode Island/USA

Tel: +1 401 737 8380
 americas@ayvaz.com